

NOTES: REF SPEC # CXWC11ASMP5

CX-WC11ASM-PS EQUIPMENT PACKAGE:

- 1 CX-33PS (60-40E033) - POWER SUPPLY CABINET WITH A CX-TRX-4024 - 40VA, 24 VAC TRANSFORMER
- 2 CM-45/4 - 4 1/2" SQUARE ACTIVATION SWITCH
- 3 CM-400/8 - 'PUSH TO LOCK' MUSHROOM PUSH BUTTON
- 4 CM-AF500 - 'OCCUPIED WHEN LIT' LED ANNUNCIATOR
- 5 CX-MDA - MAGNETIC DOOR CONTACT
- 6 CX-ED2079 - GRADE 2 UNIVERSAL ELECTRIC STRIKE


ADDITIONAL PARTS REQUIRED BUT NOT INCLUDED WITH THE CX-WC11ASM-PS:

- 7 DOOR OPERATOR - SUPPLIED BY OTHERS

SYSTEM OPERATION

CX-WC11ASM-PS OPERATION:

- A. THE DOOR IS NORMALLY CLOSED AND EITHER LOCKED OR UNLOCKED.
- B. PRESSING THE EXTERIOR PUSH PLATE UNLOCKS AND OPENS THE DOOR.
- C. ONCE INSIDE AND THE DOOR IS CLOSED, PRESSING THE 'PUSH TO LOCK' MUSHROOM PUSHBUTTON, LOCKS THE DOOR, DISABLES THE EXTERIOR 'PUSH TO OPEN' PUSH PLATE SWITCH AND ILLUMINATES THE EXTERIOR ANNUNCIATOR TO SHOW 'OCCUPIED WHEN LIT'.
- D. PRESSING THE INTERIOR PUSH PLATE SWITCH UNLOCKS THE DOOR, DEACTIVATES THE ILLUMINATED ANNUNCIATOR AND RESETS THE SYSTEM.
- E. IF THE DOOR IS OPENED MANUALLY TO EXIT THE RESTROOM, THE OVERHEAD MAGNETIC CONTACT SWITCH RESETS THE SYSTEM.

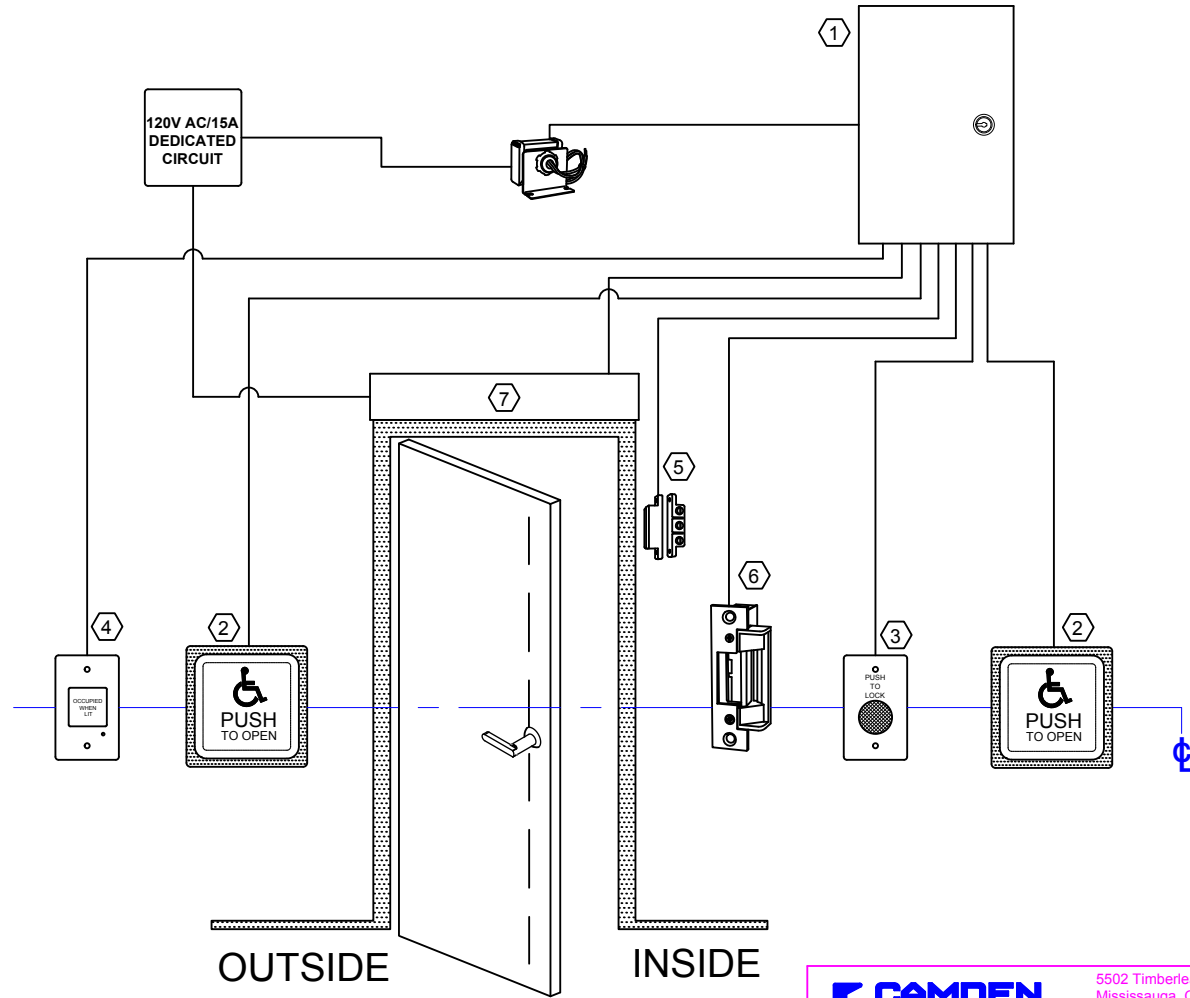

5502 Timberlea Blvd.
Mississauga, ON Canada L4W 2T7
Tel: (905) 366-3377
www.camdencontrols.com

	NAME	DATE	TITLE:						
DRAWN	A. OLISA	FEB-20	WASHROOM BARRIER FREE DOOR CONTROL NORMALLY UNSECURED (CX-WC11ASM-PS)						
CHECKED									
ENG APPR.									
MFG APPR.									
QA									
COMMENTS:			<table border="1"> <tr> <td>SIZE</td> <td>DWG. NO.</td> <td>REV</td> </tr> <tr> <td>B</td> <td>CX-WC11ASM-PS_Cad</td> <td></td> </tr> </table>	SIZE	DWG. NO.	REV	B	CX-WC11ASM-PS_Cad	
SIZE	DWG. NO.	REV							
B	CX-WC11ASM-PS_Cad								

SCALE: N/A SHEET 1 OF 1