


The following are part of the WC-13 package:

- CX-33 Relay
- CX-MDA Door Contacts
- CM-45/455SE1 Illuminated Push Plate Switch, 'PUSH TO OPEN' with Wheelchair symbol, with signage
- CM-2520/4855SE1 Illuminated Push plate switch PUSH TO OPEN/PUSH TO LOCK, with signage

The following items are required, but NOT included

- Door Operator
- Electric Strike
- 12 / 24V power supply

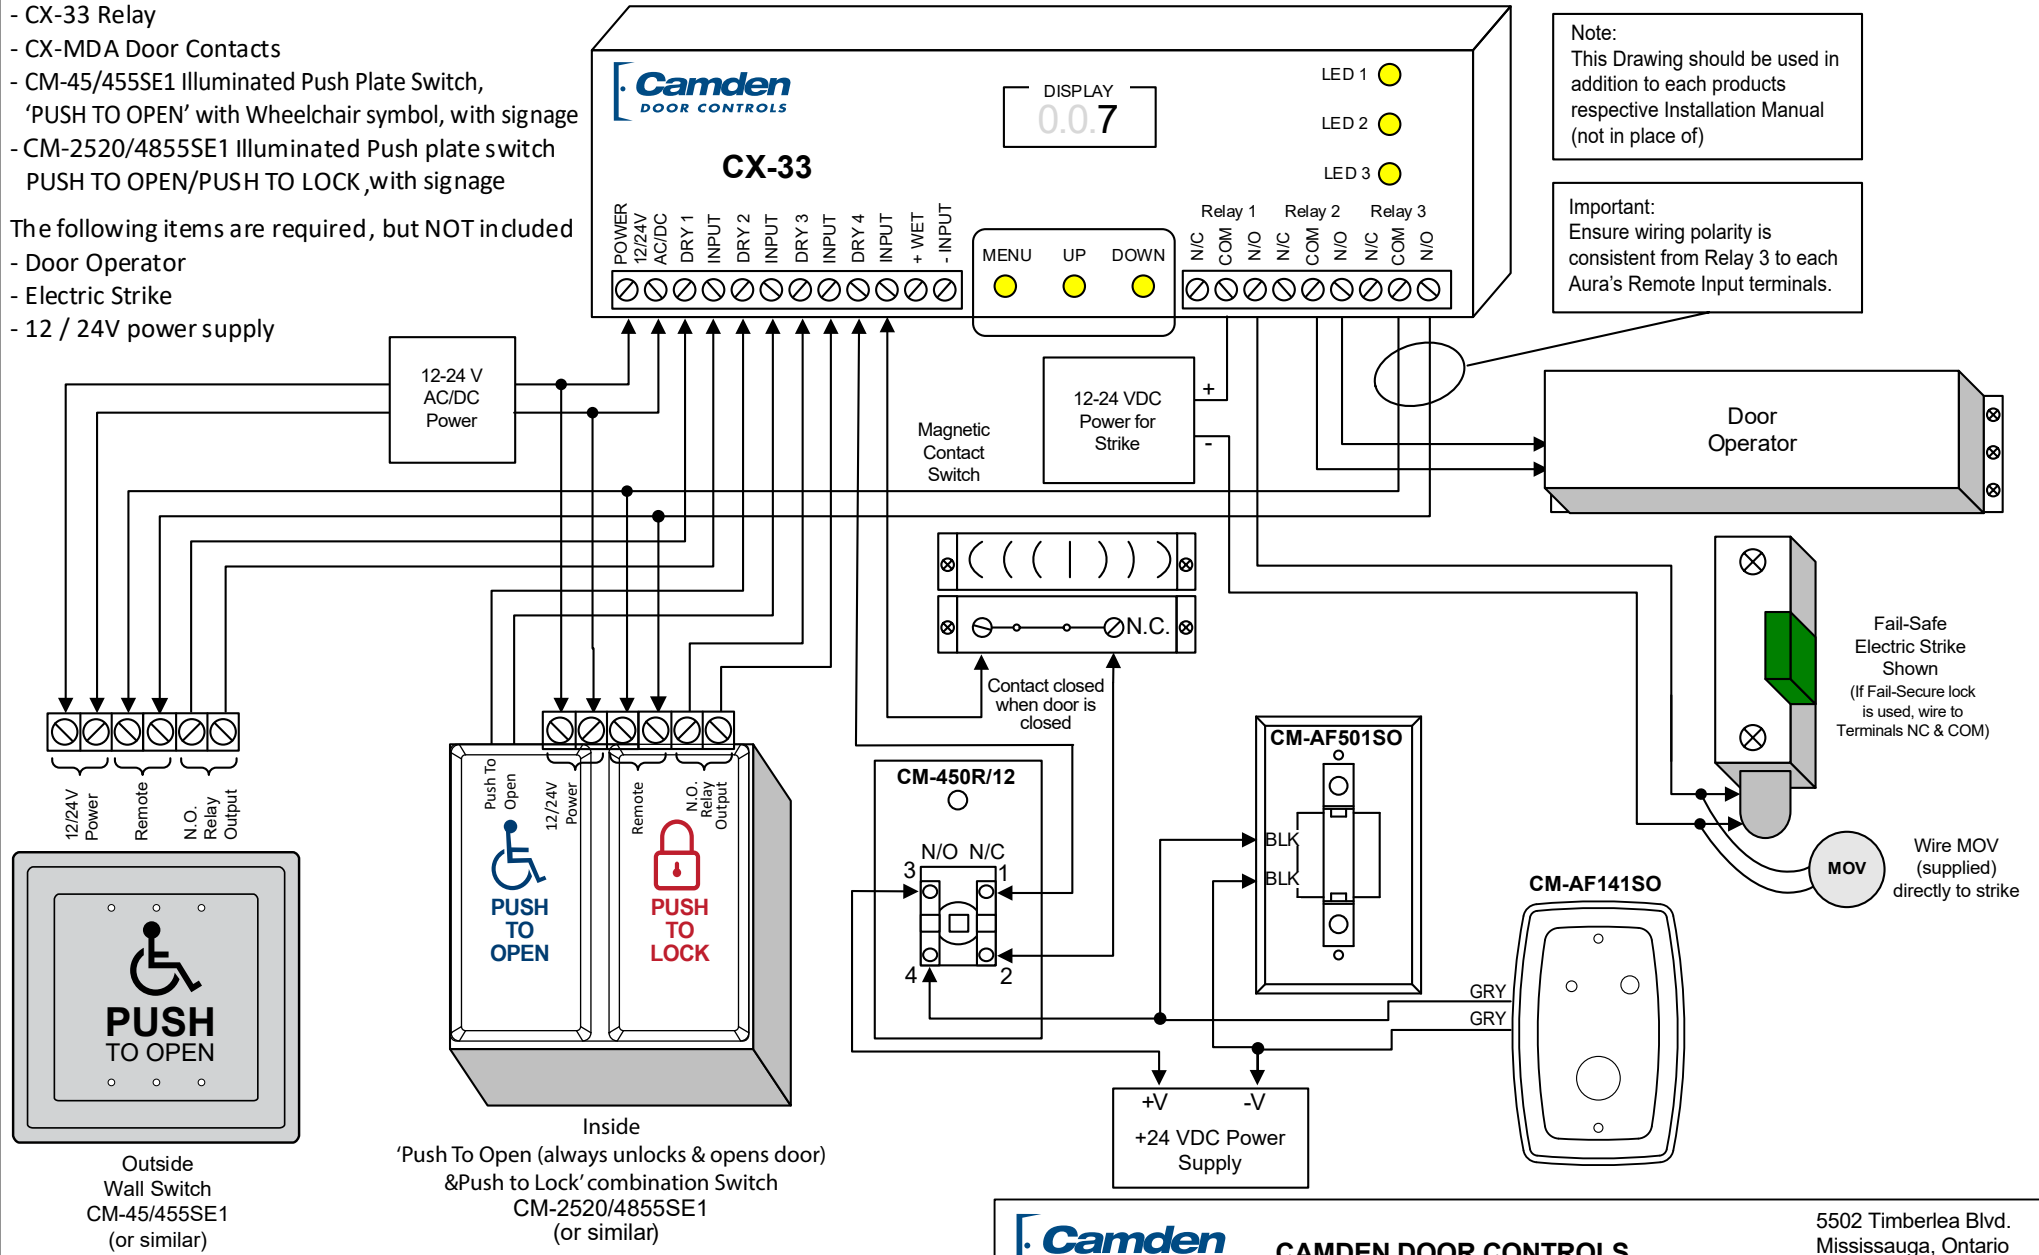


Note:
This Drawing should be used in addition to each products respective Installation Manual (not in place of)

Important:
Ensure wiring polarity is consistent from Relay 3 to each Aura's Remote Input terminals.



Outside Wall Switch
CM-45/455SE1
(or similar)

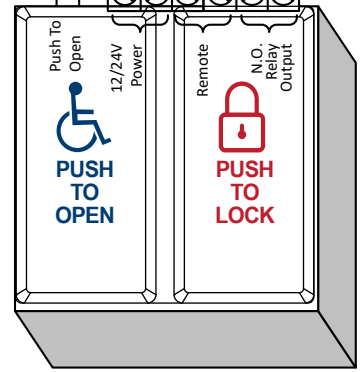

'Push To Open (always unlocks & opens door) & Push to Lock' combination Switch
CM-2520/4855SE1
(or similar)

Color Select		Enable	
	1 Red IDL 2 G/B 3 Red ACT 4 G/B		LOC/REM RELAY SPEAKER 4 3 2 1 ON
■ → ON ■ = Switch Position			


		CAMDEN DOOR CONTROLS		5502 Timberlea Blvd. Mississauga, Ontario L4W 2T7	
SCALE: NONE	DRAWN BY: DGW	DATE: 03/08/17	REV: 2		
CX-WC13AXFM & WEC10 Single Door Restroom (Normally unlocked)					
DRAWING No: CX-WC13AXFM-WEC10-8			FILE NAME: WC-13AXFM-7-WEC10 wiring diagram_R1		

The following are part of the WC-13 package:

- CX-33 Relay
- CX-MDA Door Contacts
- CM-45/455SE1 Illuminated Push Plate Switch, 'PUSH TO OPEN' with Wheelchair symbol, with signage
- CM-2520/4855SE1 Illuminated Push plate switch PUSH TO OPEN/PUSH TO LOCK

The following items are required

- Door Operator
- Electric Strike
- 12 / 24V power supply

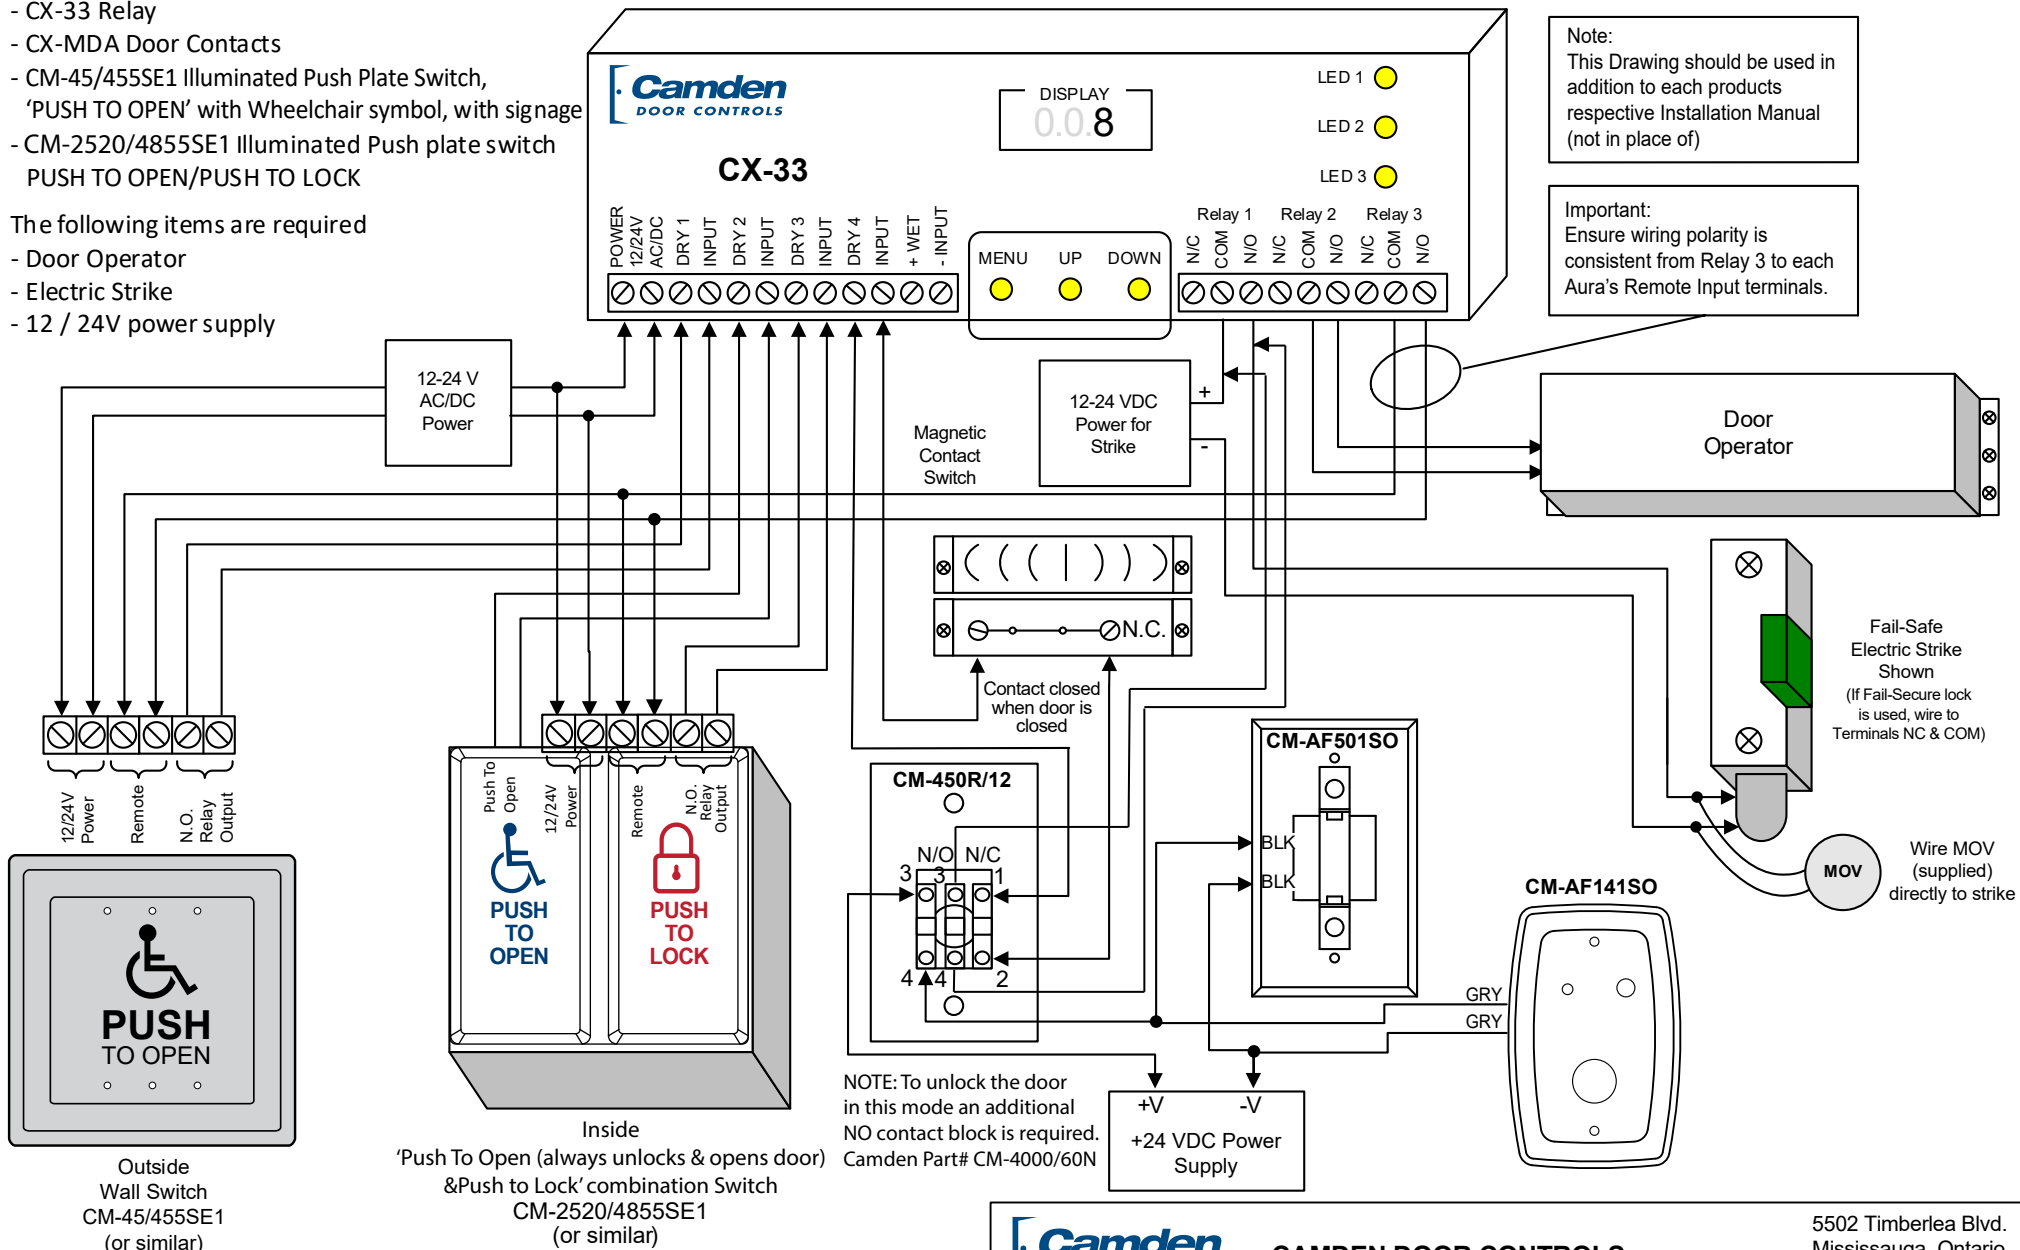

Note:
This Drawing should be used in addition to each products respective Installation Manual (not in place of)


Important:
Ensure wiring polarity is consistent from Relay 3 to each Aura's Remote Input terminals.

Fail-Safe Electric Strike Shown
(If Fail-Secure lock is used, wire to Terminals NC & COM)

Wire MOV (supplied) directly to strike



Outside Wall Switch
CM-45/455SE1
(or similar)

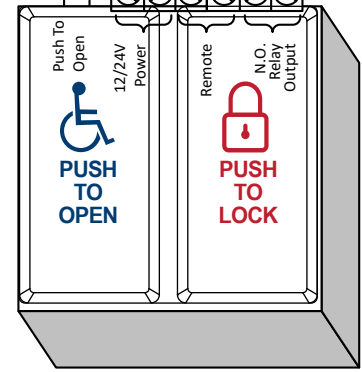

Inside
'Push To Open (always unlocks & opens door)
& Push to Lock' combination Switch
CM-2520/4855SE1
(or similar)

Aura Dip Switch Settings

Color Select

1	Red	IDL
2	G/B	
3	Red	ACT
4	G/B	

LOC/REM RELAY SPEAKER

Enable

4	ON
3	
2	
1	ON

■ → ON ■ = Switch Position ON ← ■

Camden DOOR CONTROLS

5502 Timberlea Blvd.
Mississauga, Ontario
L4W 2T7

SCALE: NONE	DRAWN BY: DGW	DATE: 03/08/17	REV: 2
CX-WC13AXFM & WEC10 Single Door Restroom (Normally locked)			
DRAWING No: CX-WC13AXFM-WEC10-8		FILE NAME: WC-13AXFM-8-WEC10 wiring diagram_R1	